



Saginaw Control & Engineering
95 Midland Road
Saginaw, MI 48638
Phone: (989)799-6871
Fax: (989)799-4524
<http://www.saginawcontrol.com>

Part Details - SCE-200AFSD

Part Number: SCE-200AFSD

Description: Arc Flash
Enclosure

Height: 32.00 inches

Width: 12.00 inches

Depth: 7.50 inches


Page Number: 1000

List Price: \$128.86

Product Code: P2

Est. Shipweight: 25.00 lbs.

NEMA Rating: 1

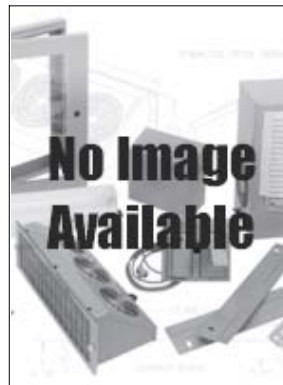

Construction -

- 0.060 Carbon Steel
- Enclosures are symmetrical for use with left or right hand disconnects.
- Removable continuous hinges.
- 110 degree door stop prevents incidental contact with other components.
- Black quarter turn latch.
- Black spring loaded quarter turn latch with 7mm square insert and key.
- Latches automatically when door is closed.
- Gland plate top and bottom provides easy installation of wires.
- Mounting holes provided in back for securing to the sub-panel.
- Ground stud on door and body.

Similar Partnumbers -

- [SCE-100AFSD](#)

Having trouble downloading drawings? [Click Here](#) for help.

Application -

Designed for use with enclosures that require additional protection against Arc Flash. This enclosure can be used within an environmentally rated enclosure to isolate the main power supply. Increasing personal protection by preventing incidental contact or exposure to the high voltage arc flash and shock hazard, and potentially reducing the PPE level for the lower risk components when the Internal Disconnect Enclosure cover is closed.

The Internal Disconnect Enclosure can be easily incorporated into a new system or added to a pre-existing system on variable depth or cable operated disconnects. Aids in achieving compliance with NFPA 70E by concealing main power supply.

Finish -

Orange Texture

Industry Standards -

NEMA Type 1

UL cUL Listed Type 1

CSA Approved Type 1

Copyright © 2000 - 2007 - Saginaw Control & Engineering