




SLOTTED CABLE TRUNKING

ECC


MADE IN ITALY

Ed. MARZO 2001

TRUNKING LINE Type A Type S

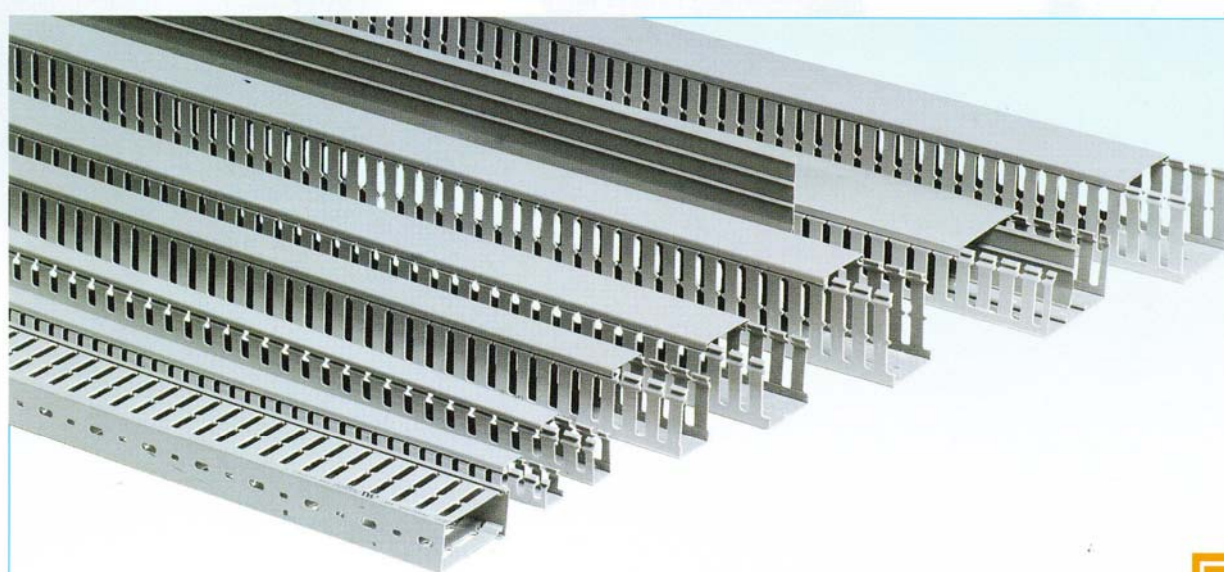

SLOTTED CABLE TRUNKING TYPE "A" PLATES 8/12

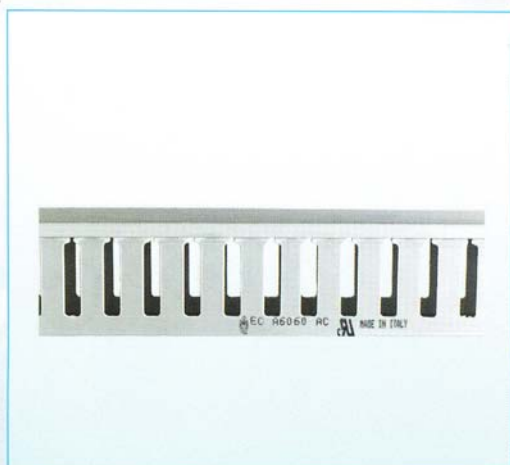


ARTICLE	DIMENSION mm b x h	m. PER PACKING
A 2525	25 x 25	100
A 2540	25 x 40	100
A 2560	25 x 60	70
A 2580	25 x 80	56
A 4025	40 x 25	80
A 4040	40 x 40	70
A 4060	40 x 60	56
A 4080	40 x 80	40
A 6040	60 x 40	50
A 6060	60 x 60	32
A 6080	60 x 80	36
A 8040*	80 x 40	40
A 8060*	80 x 60	28
A 8080	80 x 80	30
A 10040*	100 x 40	28
A 10060*	100 x 60	20
A 10080*	100 x 80	24
A 12040*	120 x 40	24
A 12060*	120 x 60	20
A 12080*	120 x 80	16
A 40100	40 x 100	32
A 60100	60 x 100	24
A 80100*	80 x 100	24
A 100100*	100 x 100	16
SES G	SEPARATOR	50




C.E.I. 23 - 22 STANDARDS

*PREPARED TO TAKE SEPARATOR

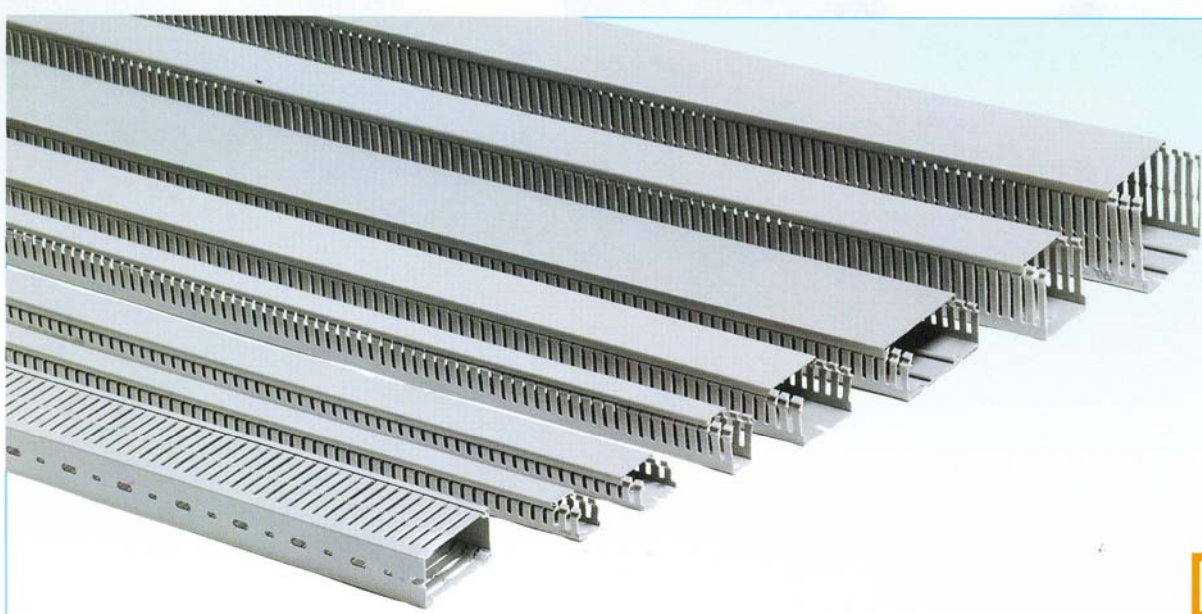

SLOTTED CABLE TRUNKING TYPE "S" PLATES 4/6

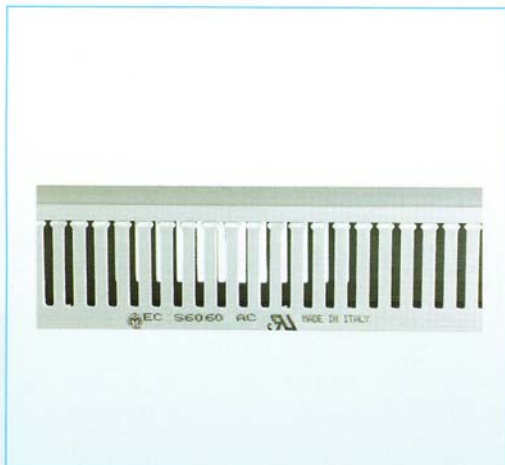

ARTICLE	DIMENSION mm b x h	m. PER PACKING
S 2525	25 x 25	100
S 2540	25 x 40	100
S 2560	25 x 60	70
S 2580	25 x 80	56
S 4025	40 x 25	80
S 4040	40 x 40	70
S 4060	40 x 60	56
S 4080	40 x 80	40
S 6040	60 x 40	50
S 6060	60 x 60	32
S 6080	60 x 80	36
S 8040*	80 x 40	40
S 8060*	80 x 60	28
S 8080	80 x 80	30
S 10040*	100 x 40	28
S 10060*	100 x 60	20
S 10080*	100 x 80	24
S 12040*	120 x 40	24
S 12060*	120 x 60	20
S 12080*	120 x 80	16
S 40100	40 x 100	32
S 60100	60 x 100	24
S 80100*	80 x 100	24
S 100100*	100 x 100	16
SES G	SEPARATOR	50



C.E.I. 23 - 22 STANDARDS

*PREPARED TO TAKE SEPARATOR





SPIRAL WRAP BLACK OR TRANSPARENT POLYTHENE

ART.	mm Ø INT./EXT.	m PER HANK	m PER PACKING
P 03	3/5	25	500
P 04	4/6	25	500
P 06	6/8	25	300
P 08	8/10	25	400
P 10	10/12	25	200
P 12	12/14	20	160
P 14	14/16	20	160

SPIRAL WRAP SELF-EXTINGUISHING POLYTHENE

ART.	mm Ø INT./EXT.	m PER HANK	m PER PACKING
PA 03	3/5	25	500
PA 04	4/6	25	500
PA 06	6/8	25	300
PA 08	8/10	25	400
PA 10	10/12	25	200
PA 12	12/14	20	160

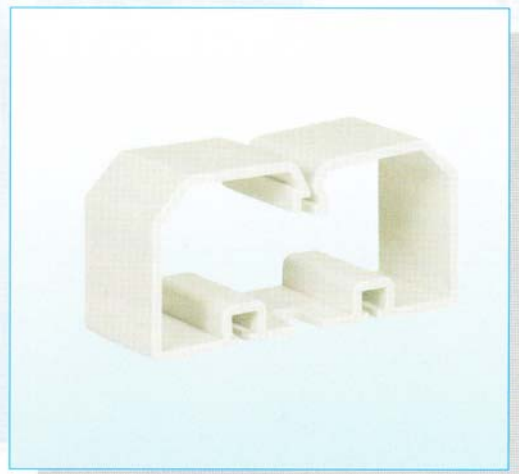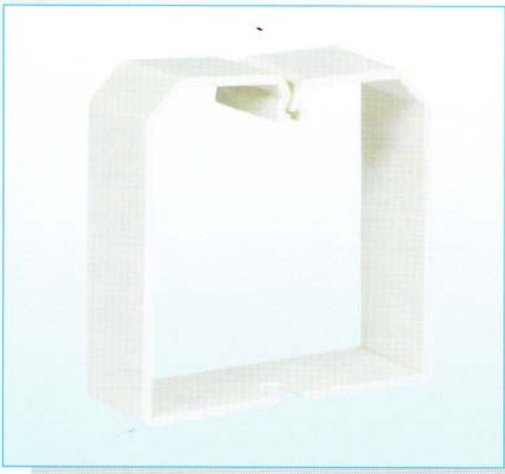

CLIPS FOR CABLES HOLDING


ARTICLE	FOR TRUNKING DIM. MM.	PIECES PER PACKAGE	PIECES PER PACKING
CO 4040	40 x 40	5	25
CO 4060	40 x 60	5	25
CO 4080	40 x 80	5	25
CO 40100	40 x 100	5	25
CO 6040	60 x 40	5	25
CO 6060	60 x 60	5	25
CO 6080	60 x 80	5	25
CO 60100	60 x 100	5	25
CO 8040	80 x 40	5	25
CO 8060	80 x 60	5	25
CO 8080	80 x 80	5	25
CO 80100	80 x 100	5	25
CO 10040	100 x 40	5	25
CO 10060	100 x 60	5	25
CO 10080	100 x 80	5	25
CO 100100	100 x 100	5	25
CO 12040	120 x 40	5	25
CO 12060	120 x 60	5	25
CO 12080	120 x 80	5	25

COLOUR GREY


In self-extinguishing material
Screw fixing



BOTTOM HOLES DIMENSIONS

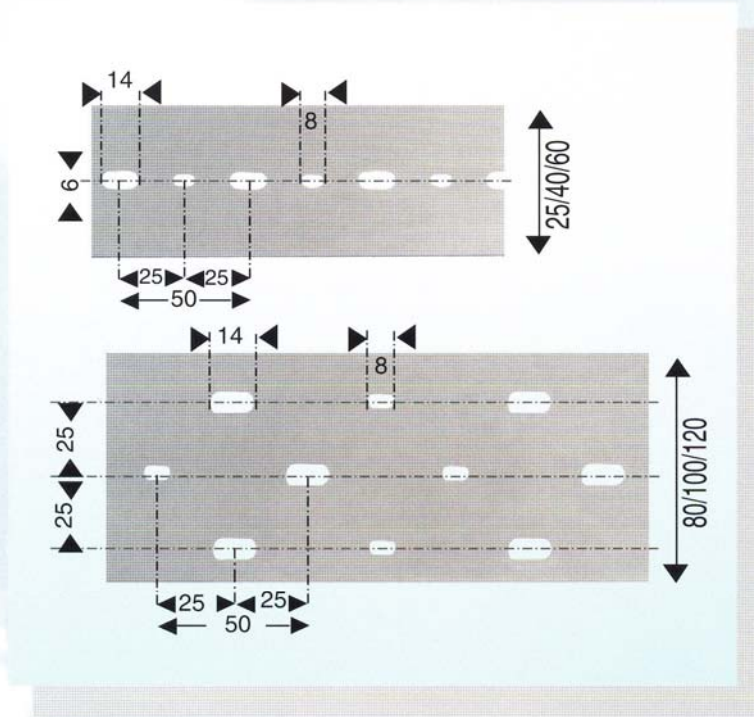

EMPTY AND PLATES DIMENSIONS

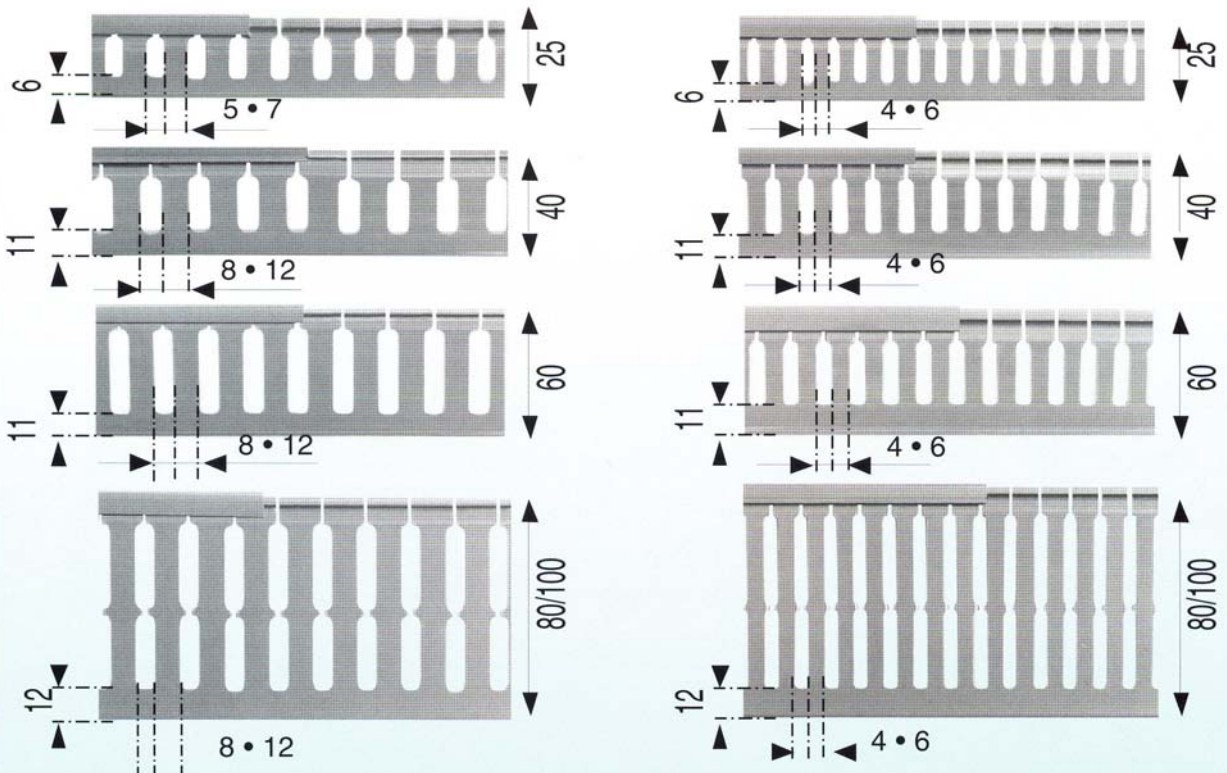

TECHNICAL CHARACTERISTICS

MATERIAL: SELF-EXTINGUISHING PVC DEGREE V0 TO UL 94.

RESISTANCE TO FLAME AND ABNORMALLY HIGH TEMPERATURE: UP TO 960° C
(GLOW WIRE TEST).

SHOCK RESISTANCE: 2 J.

MAXIMUM TEMPERATURE FOR CONTINUOUS USE: 60° C.

STANDARD UNIT LENGTH: 2 M.

STANDARD COLOUR: RAL 7030 GREY; OTHER COLOURS ON REQUEST.

A DOUBLE BREAKOUT FACILITY IS PROVIDED ALLOWING EASY REMOVAL OF FINGERS OR THE SIDEWALL CAN BE BROKEN OUT TO THE BASE WHEN BRANCH CONNECTIONS ARE USED.

THE SIDES OF FINGERS ARE ROUNDED AND SMOOTHED TO AVOID DAMAGE TO THE CABLE INSULATION.

MANUFACTURED TO C.E.I. 23 - 22 STANDARDS.

SHIPPED IN STOUT CARDBOARD BOXES WITH IDENTIFICATION LABEL.

APPROVED BY I.M.Q. REF. EA850.

APPROVED BY U.L. REF 169019.

